



TOP VIEW

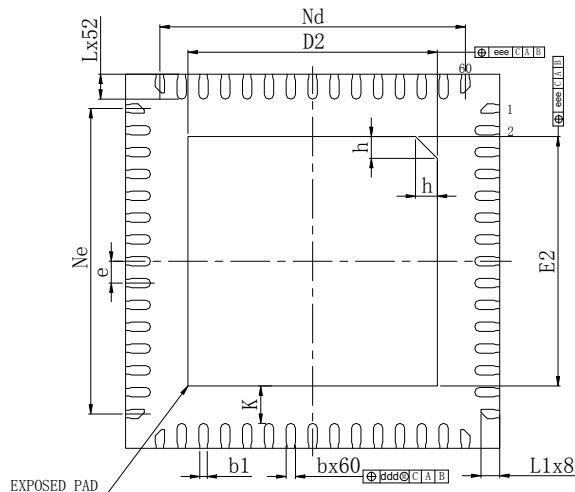

ZONE

BOTTOM VIEW



SIDE VIEW

	SYMBOL	MILLIMETER			
		MIN	NOM	MAX	
TOTAL THICKNESS	A	0.50	0.55	0.60	
STAND OFF	A1	0	0.02	0.05	
LEAD WIDTH	b	0.10	0.15	0.20	
LEAD END WIDTH	b1	0.12REF			
L/F THICKNESS	c	0.152REF			
BOOY SIZE	X	D	5.90	6.00	6.10
	Y	E	5.90	6.00	6.10
LEAD PITCH	e	0.35BSC			
EP SIZE	X	D2	3.90	4.00	4.10
	Y	E2	3.90	4.00	4.10
ACCUMULATIVE PITCH	X	Nd	4.90BSC		
	Y	Ne	4.90BSC		
LEAD LENGTH	L	0.35	0.40	0.45	
	L1	0.20	0.30	0.35	
SPACING BETWEEN LEAD EDGE TO E-PAD EDGE	K	0.60REF			
PIN 1# ID	h	0.30	0.35	0.40	
PACKAGE EDGE TOLERANCE	aaa	0.10			
MOLD FLATNESS	bbb	0.10			
COPLANARITY	ccc	0.08			
LEAD OFFSET	ddd	0.10			
EXPOSED PAD OFFSET	eee	0.10			

\*\*\*特殊要求: 无

更改标记	更改内容	签名	日期	
华天科技(西安)有限公司 Hua Tian Technology (Xi'an) Co., Ltd.				
QFN60L (0606X0.55-0.35) (B) 产品外形图		图号: HTDX06006060002		
		单位	版次	密级
		mm	0版	秘密
		第 1 张	共 1 张	

参考图号 客户要求

拟 制		复 审	
审 核		会 签	
		标 准 化	
制 图		批 准	
幅 面:	A4	比 例:	1:1

